

WM TELESCOPIC

PRACTICAL, EASY TO USE MOBILE TELESCOPIC RAMP. IN PERFORATED ANTI-SLIP ALUMINIUM WITH SAFETY EDGES.

LOAD CAPACITY: UP TO 300 KG PER PAIR OF RAMPS




LOAD CAPACITY
300 kg per pair

STANDARD DIMENSIONS
Width 18.5 cm
Length 150, 200, 225, 250 and 300 cm

HANDLING
Mobile

COLOUR
Yellow

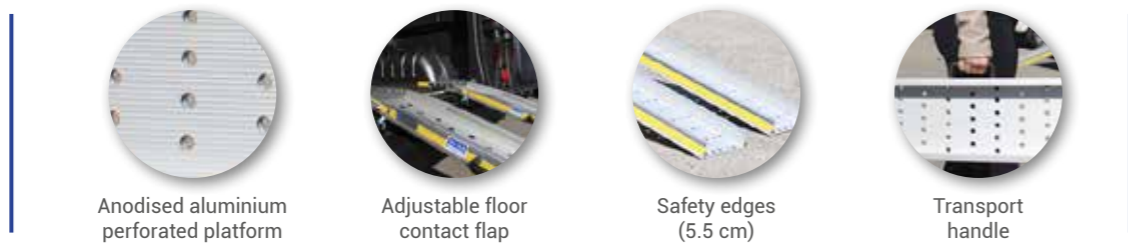

REMOVABILITY AND TRANSPORT


The WM Telescopic is unique in the way it can be extended to the required length. This ramp offers a rest-on, folding contact plate for safe and secure loading. These can be supplied individually or as a pair as required.

OPTIONAL EXTRAS






ECO VERSION
ECO version also available: unperforated loading platform, without taper in the contact flap and without yellow colour on safety edges.

APPLICATION SECTORS

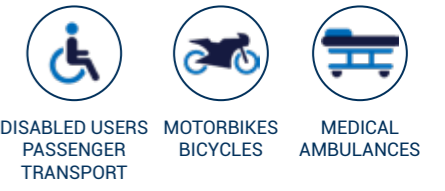

CONTACT FLAP:
• TAPERED
• WITH 4 HEIGHT SETTINGS
• REST-ON (20 CM CONTACT LENGTH ON PLATFORM)
• FOLDING

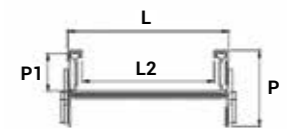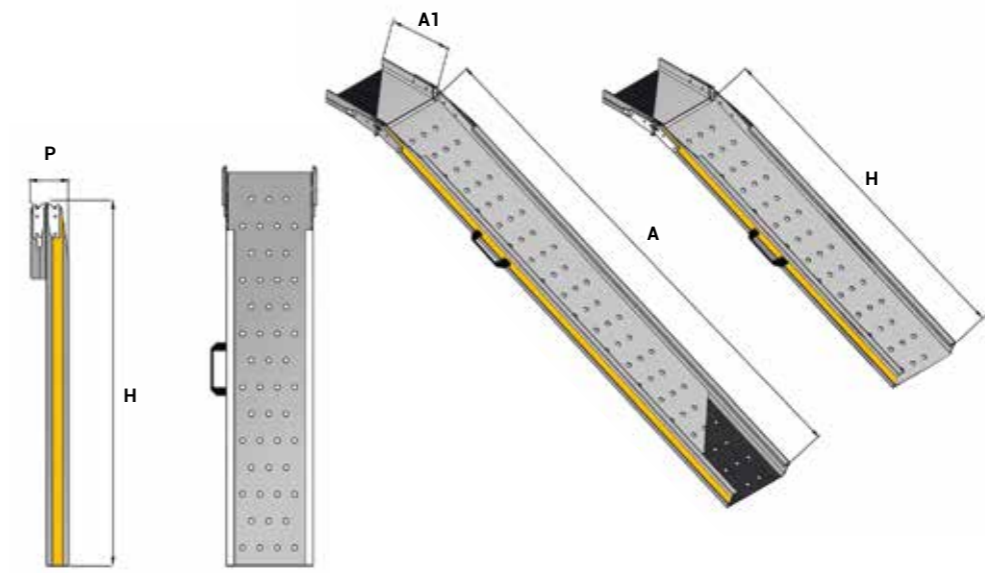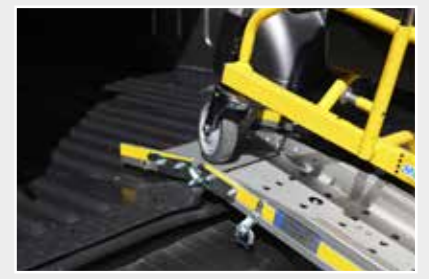

ALL MODELS	A (mm)	A1 (mm)	L (mm)	L2 (mm)	H (mm)	P (mm)	P1 (mm)	Load capacity per pair (kg)	Weight (kg)
WM TELESCOPIC	1500	200	225	185	900	106	55	300	5
WM TELESCOPIC	2000	200	225	185	1150	106	55	300	6
WM TELESCOPIC	2250	200	225	185	1275	106	55	300	6,5
WM TELESCOPIC	2500	200	225	185	1400	106	55	300	7
WM TELESCOPIC	3000	200	225	185	1650	106	55	300	8